





THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

1	2	3	4	5	6	7	8	9	10	Customer drawing
REV	ECN NO	DESCRIPTION			DATE	APPROVED				
A	-	NEW RELEASED			2020.07.28	MAY.YU				

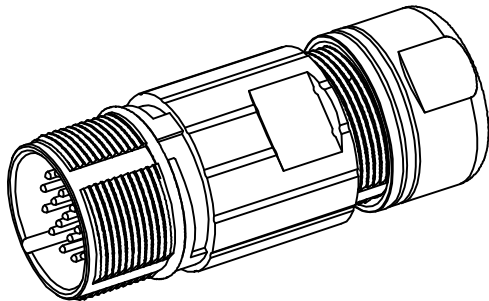



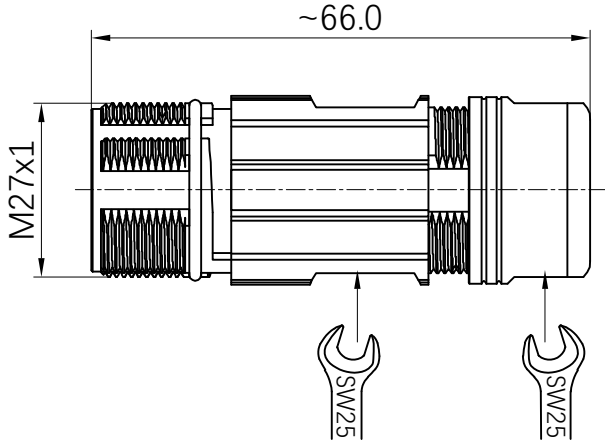

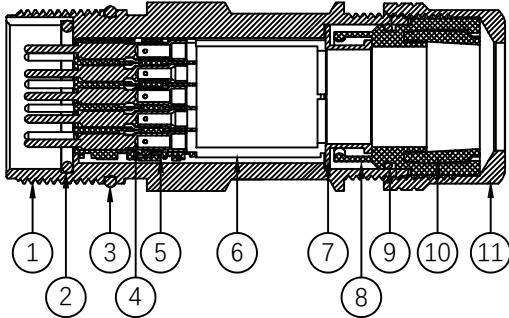



Material:

- 1. M27 Metal Thread: Zinc Alloy, Nickel-Plated
- 2. O-Ring: NBR, Black
- 3. O-Ring: NBR, Black
- 4. Contact: Copper Alloy, Gold-Plated
- 5. Insulation: PA, Black
- 6. Insulation Sleeve: PA, Black
- 7. Clasp ring: Copper Alloy, Nickel-Plated
- 8. O-Ring: NBR, Black
- 9. Cable Clamp: PA, Black
- 10. Cable Seal: NBR, Black
- 11. Pressing Nut: Copper Alloy, Nickel-Plated

Technical Data:

- 1. Standard: DIN 43650
- 2. Rated Voltage: 60V AC/DC
- 3. Rated Current: 7.5A
- 4. Rated Temperature: -40°C~+125°C
- 5. Durability: ≥ 500 Times Cycles
- 6. Protection Degree: IP67 (Correct locking state)



UNMARKED TOLERANCES		TITLE M27 CABLE CONNECTOR 26PIN SIGNAL PLUG FIELD INSTALLATION STRAIGHT		 Yameter			
DIMENSIONS	TOLERANCE	CUSTOMER	-	CUSTOMER PART NO.	-		
x.	±0.5	DRAWN BY	MAY.YU	PART NUMBER	M27AM26A7BK01	SIZE	REV
x.x	±0.25	CHECKED BY	BILL.LEE	DRAWING NUMBER	M27AM26A7BK01	A4	A
x.xx	±0.15	APPROVED BY	TIGER.WANG	SCALE FREE	ALL DIMENSION UNIT IN MM	SHEET 1 OF 1	
0 to 500	+15 / -0						
> 501	+3%/-0 of length						
ANGLES							
x°	±1°						

</