


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

1		2		3		4		5		6		7		8		9		10		Customer drawing	
REV	ECN NO		DESCRIPTION					DATE		APPROVED		RoHS									
A	-		NEW RELEASED					2020.07.28		MAY.YU											

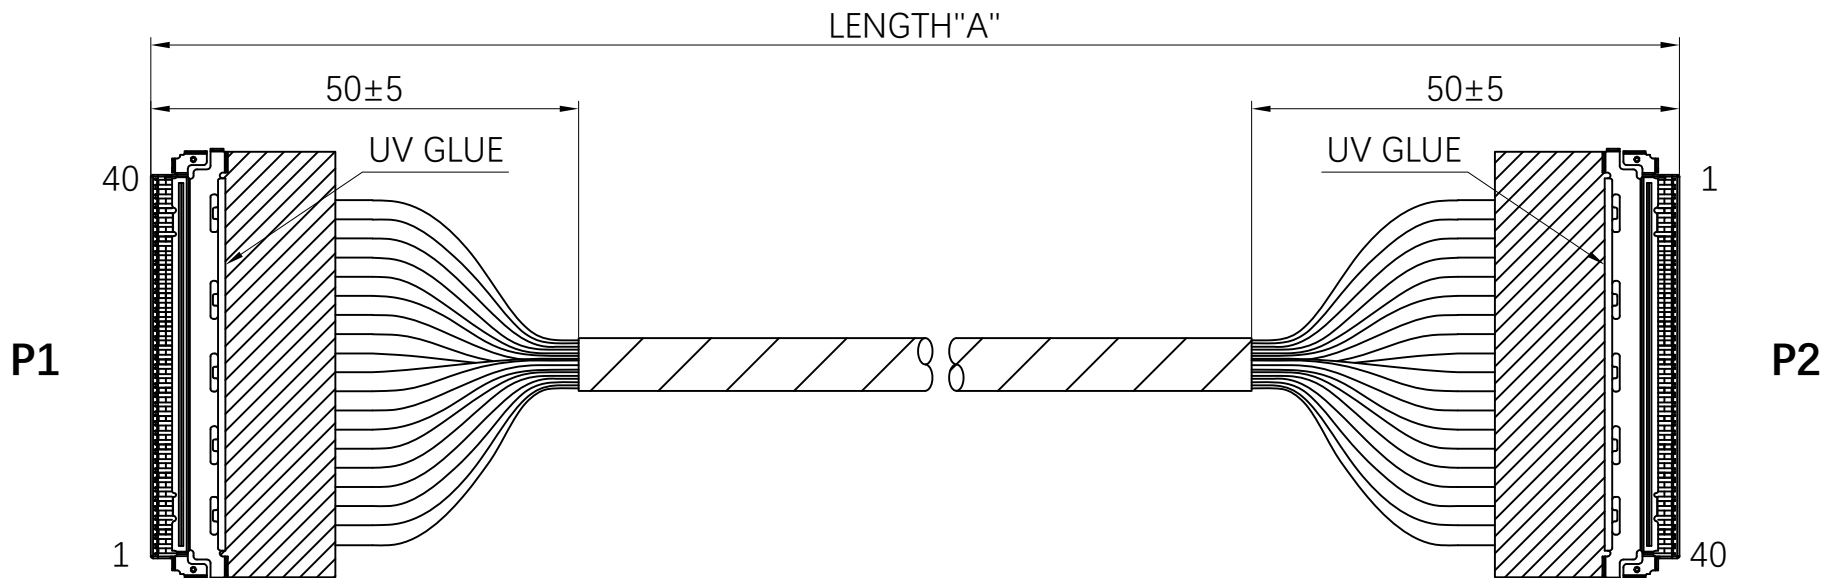

Material:

- . Housing: PA,UL94V-0
- . Contact: Phosphor bronze, Gold-plated

Technical Data:

- . Rated Voltage: 30V AC,DC
- . Rated Current: 0.5A
- . Rated Temperature: -25°C~+85°C
- . Contact resistance: Initial value/10m Ωmax.
After environmental testing/20m Ωmax.
- . Insulation resistance: 500M Ωmin.
- . Withstanding voltage: 1500V AC/minute
- . Applicable Wire: 36AWG

UNMARKED TOLERANCES		TITLE IPEX 20455-40T LVDS CABLE HARNESS		 Yameter					
DIMENSIONS	TOLERANCE								
x.	±0.5								
x.x	±0.25								
x.xx	±0.15								
0 to 500	+15 / -0	CUSTOMER	-	CUSTOMER PART NO.	-				
> 501	+3%/-0 of length	DRAWN BY	MAY.YU	PART NUMBER	harness-20455-40t			SIZE	REV
ANGLES		CHECKED BY	KIMKEE	DRAWING NUMBER	harness-20455-40t			A4	A
x°	±1°	APPROVED BY	TIGER.WANG	SCALE FREE	ALL DIMENSION UNIT IN MM			SHEET 1 OF 1	

0 10 20 30 40 50 60 70 80 90 100 110 120