


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REV	ECN NO	DESCRIPTION	DATE	APPROVED	Customer drawing				
A	-	NEW RELEASED	2022.01.05	CLARA					

RoHS



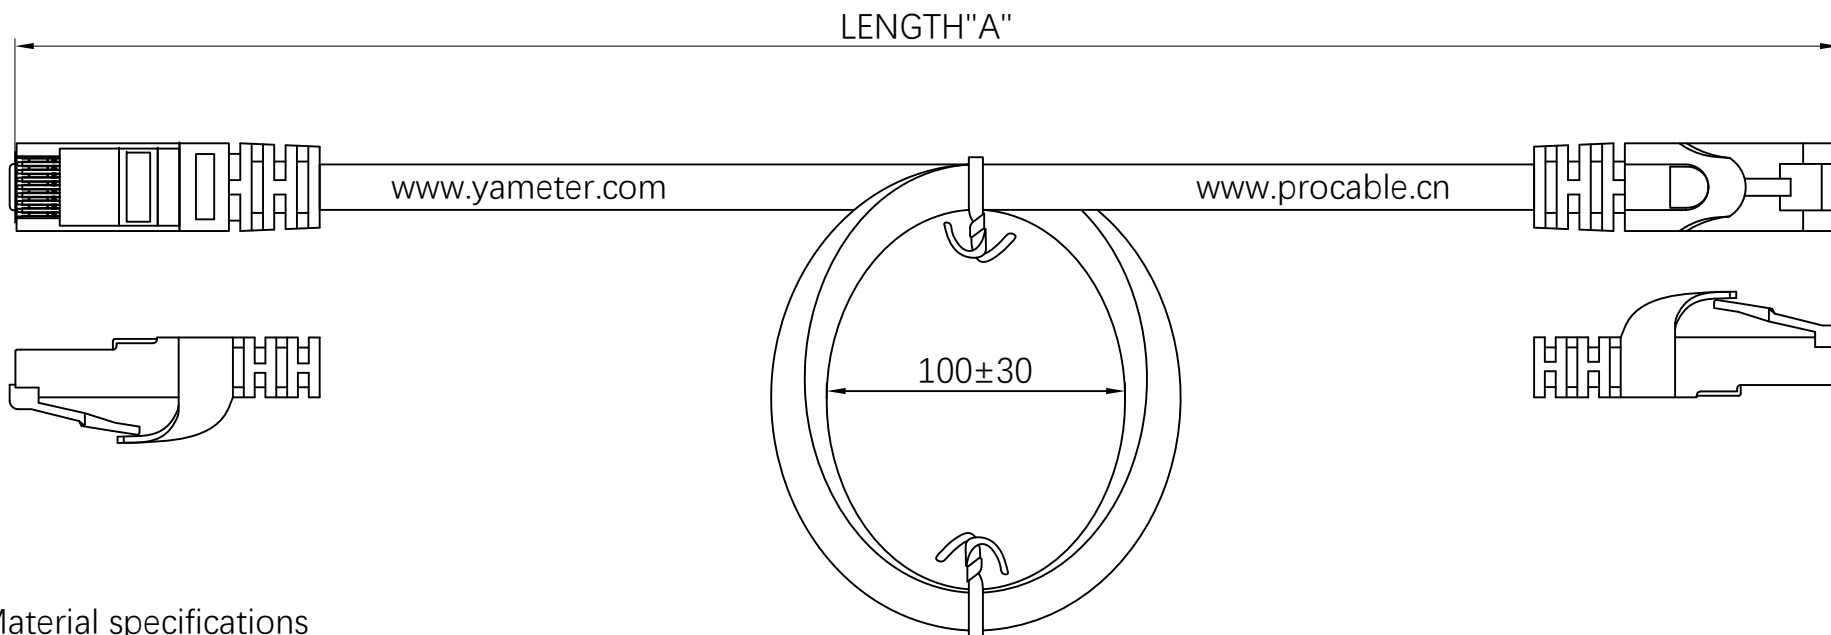



Material specifications
Contact: Brass with gold plated
Insulation: PC, UL94V-0
Housing: Brass with nickel plated

Mechanical properties
Minimum bending radius: Fixed installation: 8x Cable OD
Flexible installation: 10x Cable OD

Electrical testing of finished cable
100% Open / Short / Miswiring testing
Insulation resistance: DC300V 10MΩ
Conductor resistance: 5Ω



UNMARKED TOLERANCES		TITLE NETWORK LAN PATCH CABLE CAT6A CABLE ASSEMBLY		<div> Yameter</div> <div></div>					
DIMENSIONS	TOLERANCE								
x.	±0.5								
x.x	±0.25								
x.xx	±0.15								
0 to 500	+15 / -0	CUSTOMER	-	CUSTOMER PART NO.	-		 		
> 501	+3%/-0 of length	DRAWN BY	CLARA	PART NUMBER	lan-cable-cat6a		SIZE	REV	
ANGLES		CHECKED BY	BILL	DRAWING NUMBER	lan-cable-cat6a		A4	A	
x°	±1°	APPROVED BY	KIMKEE	SCALE FREE	ALL DIMENSION UNIT IN MM			SHEET 1 OF 1	

0 10 20 30 40 50 60 70 80 90 100 110 120