


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

1		2		3		4		5		6		7		8		9		10		Customer drawing	
REV	ECN NO		DESCRIPTION					DATE		APPROVED		RoHS									
A	-		NEW RELEASED					2022.01.05		MAY.YU											

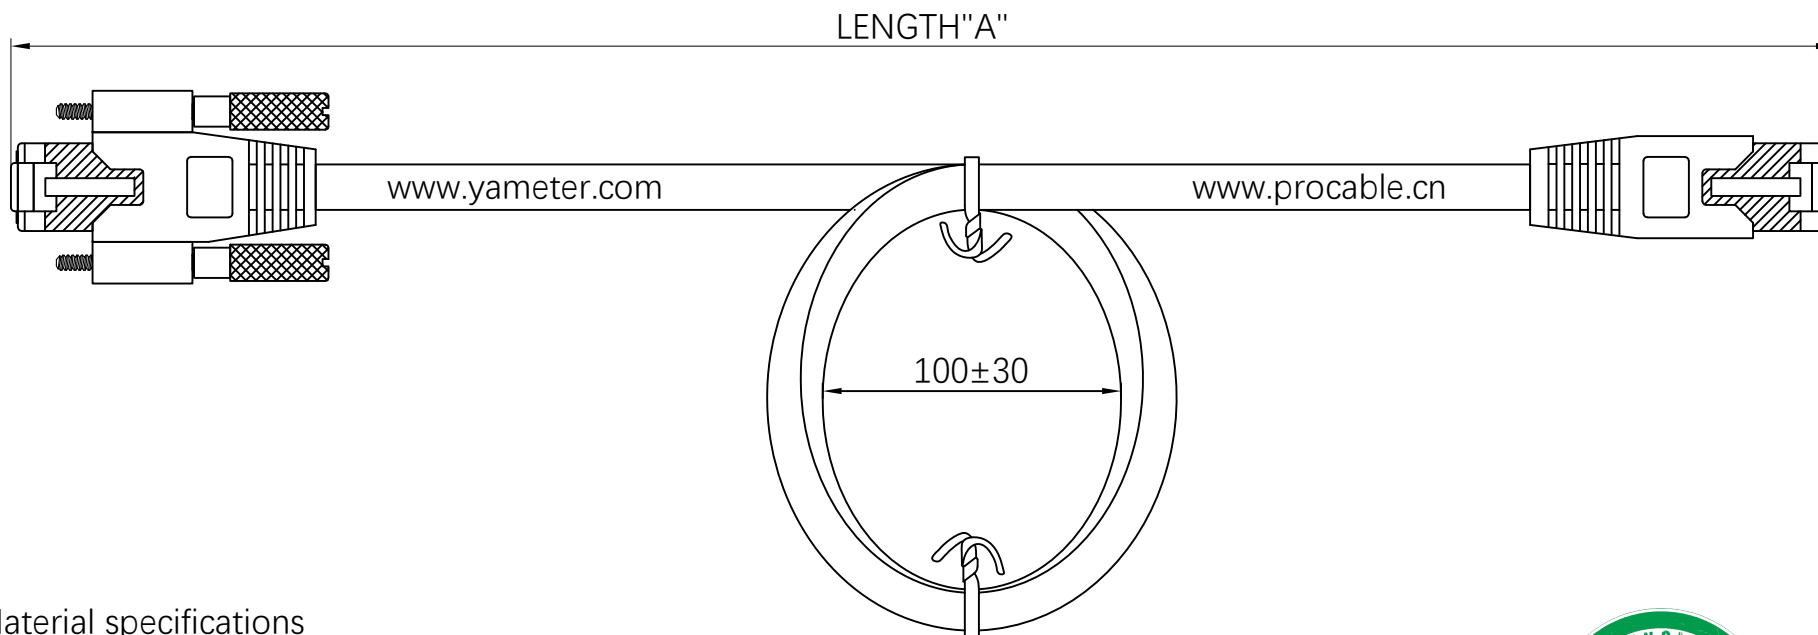

Material specifications
Contact: Brass with gold plated
Insulation: PC, UL94V-0
Housing: Brass with nickel plated

Mechanical properties
Minimum bending radius: Fixed installation: 8x Cable OD
Flexible installation: 10x Cable OD

Electrical testing of finished cable
100% Open / Short / Miswiring testing
Insulation resistance: DC300V 10MΩ
Conductor resistance: 5Ω



UNMARKED TOLERANCES		TITLE RJ45 PLUG/PLUG EHTERNET WITH SCREW CABLE ASSEMBLY		 Yameter 			
DIMENSIONS	TOLERANCE						
x.	±0.5						
x.x	±0.25						
x.xx	±0.15						
0 to 500	+15 / -0	CUSTOMER	-	CUSTOMER PART NO.	-	 	
> 501	+3%/-0 of length	DRAWN BY	MAY.YU	PART NUMBER	lan-cable	SIZE A4	REV A
ANGLES		CHECKED BY	BILL.LEE	DRAWING NUMBER	lan-cable		
x°	±1°	APPROVED BY	TIGER.WANG	SCALE FREE	ALL DIMENSION UNIT IN MM		SHEET 1 OF 1

0 10 20 30 40 50 60 70 80 90 100 110 120