

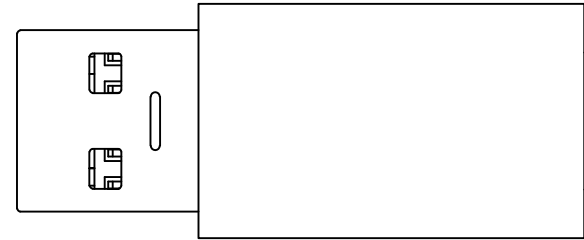


THIS DRAWING CONTAINS PROPRIETARY INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REV	ECN NO	DESCRIPTION	DATE	APPROVED
A	-	NEW RELEASED	2020.07.28	MAY.YU

Customer drawing


RoHS



Electrical specifications:
 Use of voltage range: 30V
 Current range: 0.5A
 Temperature range: -20°C~+80°C

Material specifications
 Connector: USB3.0 Type-C
 Overmolding: Black PVC

Electrical testing of finished cable
 100% Open / Short / Miswiring testing
 Insulation resistance: DC150V 10MΩMin
 Conductor resistance: 3Ω Max



UNMARKED TOLERANCES	
DIMENSIONS	TOLERANCE
x.	±0.5
x.x	±0.25
x.xx	±0.15
0 to 500	+15 / -0
> 501	+3%/-0 of length
ANGLES	
x°	±1°

TITLE STANDARD USB3.0 PLUG/TYPER-C SOCKET ADAPTER CONNECTOR	
CUSTOMER	-
DRAWN BY	MAY.YU
CHECKED BY	BILL.LEE
APPROVED BY	TIGER.WANG

Yameter			
CUSTOMER PART NO.	-	SIZE	REV
PART NUMBER	usb3-apcs-adapter	A4	A
DRAWING NUMBER	usb3-apcs-adapter	SHEET 1 OF 1	
SCALE FREE	ALL DIMENSION UNIT IN MM		

