


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

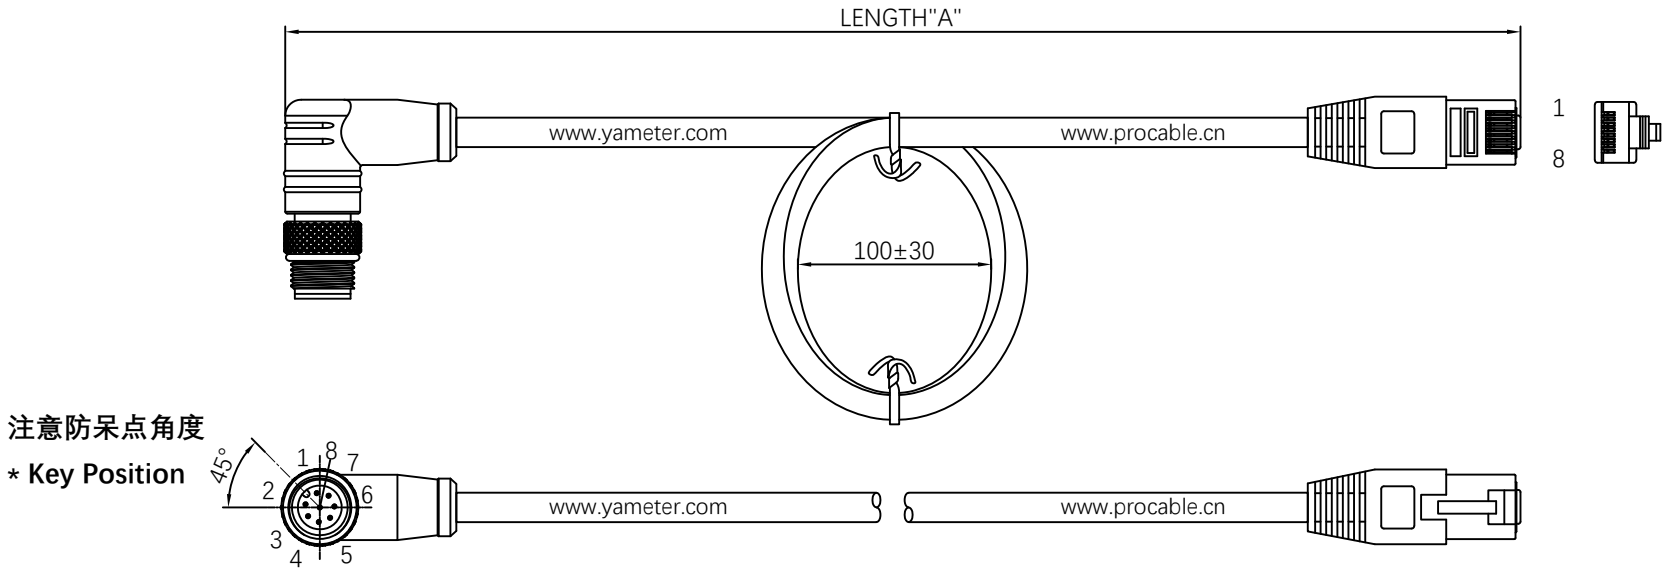

Electrical specifications:
Use of voltage range: 30V
Current range: 2A
Temperature range: -20°C~+80°C

Material specifications:
Cable: CAT5E SHIELD CABLE
Connector: M12 A Code Plug/RJ45 Plug
Body Shell: Black TPU

Electrical testing of finished cable:
100% Open / Short / Miswiring testing
Insulation resistance: DC300V 10MΩMin
Conductor resistance: 5Ω Max



UNMARKED TOLERANCES		TITLE		Yameter		QR CODE	
DIMENSIONS	TOLERANCE						
x	±0.5	M12 INDUSTRIAL ETHERNET CABLE ASSEMBLY					
x.x	±0.25						
x.xx	±0.15						
0 to 500	+15 / -0	CUSTOMER	-	CUSTOMER PART NO.	-	SHEET 1 OF 1	
> 501	+3W/-0 of length	DRAWN BY	CLARA	PART NUMBER	lan-cable-m12-angle		
ANGLES		CHECKED BY	BILL	DRAWING NUMBER	lan-cable-m12-angle		
x°	±1°	APPROVED BY	KIMKEE	SCALE FREE	ALL DIMENSION UNIT IN MM		

